

# TC51/TC56 Accessories



NOTE: This document is only for general reference. Solution Builder and related PMBs should be used for product availability, pricing, and final solution selection.




## Cradles/Charging







Part Number	Picture	Description	Notes	Required Items
CRD-TC51-1SCU-01		Single Slot USB/Charging ShareCradle	<ul style="list-style-type: none"> <li>Will charge TC51/TC56 only. Does not charge spare battery.</li> <li>Will charge battery in TC51/56 from 0-90% in as little as 2.5 hours</li> <li>Compatible with TC5X units with hand strap, Rugged Boot, or Pistol Grip Handle attached.</li> <li>Includes cradle insert/shim that requires removal when using a TC51/TC56 unit with the Rugged Boot/Exoskeleton or Pistol Grip Handle attached.</li> <li>Connects to rugged charge/communication connector on bottom of TC51/TC56.</li> <li>USB to Ethernet Module Kit (KT-TC51-ETH1-01) can be used to convert to Ethernet enabled cradle.</li> <li>Includes Single Slot Cradle (CRD-TC51-1SCU1-01), Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01)</li> </ul>	AC Line Cord (23844-00-00R)  USB Cable (25-124330-01R) for PC connection
CRD-TC51-HC1SC-01		Single Slot Healthcare USB/Charging ShareCradle	<ul style="list-style-type: none"> <li>Has Healthcare white disinfectant ready housing.</li> <li>Will charge TC51/TC56 only. Does not charge spare battery.</li> <li>Will charge battery in TC51/56 from 0-90% in as little as 2.5 hours</li> <li>Compatible with TC5X units with hand strap, Rugged Boot, or Pistol Grip Handle attached.</li> <li>Includes cradle insert/shim that requires removal when using a TC51/TC56 unit with the Rugged Boot/Exoskeleton or Pistol Grip Handle attached.</li> <li>Connects to rugged charge/communication connector on bottom of TC51/TC56.</li> <li>USB to Ethernet Module Kit (KT-TC51-ETH1-01) can be used to convert to Ethernet enabled cradle.</li> <li>Includes Single Slot Cradle (CRD-TC51-HC1SC1-01), Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01)</li> </ul>	AC Line Cord (23844-00-00R)  USB Cable (25-124330-01R) for PC connection
KT-TC51-ETH1-01		USB to Ethernet Module Kit	<ul style="list-style-type: none"> <li>Attaches to Single Slot USB/Charging Cradle (CRD-TC51-1SCU-01) to provide Ethernet support</li> <li>Mechanical switch selects between USB B port and RJ45 Ethernet jack.</li> <li>10/100/1000 Mbps speed</li> <li>LEDs on module indicate connectivity and speed.</li> <li>Includes USB to Ethernet Module (MOD-MT2-EU1-01) and Support Bracket/Plate (BRKT-TC51-ENET1-01).</li> </ul>	Single Slot USB/Charging Cradle (CRD-TC51-1SCU-01)

<p>PSDTC56U (3rd party)</p> <p><a href="http://www.portsmith.com">http://www.portsmith.com</a></p>		<p>Portsmith Single Slot Ethernet Charging Cradle</p>	<ul style="list-style-type: none"> <li>▶Connects to rugged charge/communication connector on bottom of TC51/TC56.</li> <li>▶Compatible with devices with and without Rugged Boot/Exoskeleton attached.</li> <li>▶PSV1-2 kit includes PSDTC56U Cradle, power supply, and Ethernet patch cable.</li> </ul>	
<p>CRD-TC51-5SCHG-01</p>		<p>5-Slot Charge-Only ShareCradle</p>	<ul style="list-style-type: none"> <li>▶Will charge up to five TC51/TC56 units.</li> <li>▶Will charge battery in TC51/56 from 0-90% in as little as 2.5 hours</li> <li>▶Does not charge spare batteries</li> <li>▶Compatible with TC51/TC56 units with hand strap, Rugged Boot, or Pistol Grip Handle attached.</li> <li>▶Includes cradle insert/shim that requires removal when using a TC51/TC56 unit with the Rugged Boot/Exoskeleton or Pistol Grip Handle attached.</li> <li>▶Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01)</li> <li>▶Connects to rugged charge connector on bottom of TC51/TC56</li> <li>▶Includes Power Supply (PWR-BGA12V108W0WW) and DC Line Cord (CBL-DC-381A1-01)</li> </ul>	<p>AC Line Cord (23844-00-00R)</p>
<p>CRD-TC51-HC5SC-01</p>		<p>5-Slot Healthcare Charge-Only ShareCradle</p>	<ul style="list-style-type: none"> <li>▶Has Healthcare white disinfectant ready housing.</li> <li>▶Will charge up to five TC51/TC56 units.</li> <li>▶Will charge battery in TC51/56 from 0-90% in as little as 2.5 hours</li> <li>▶Does not charge spare batteries</li> <li>▶Compatible with TC51/TC56 units with hand strap, Rugged Boot, or Pistol Grip Handle attached.</li> <li>▶Includes cradle insert/shim that requires removal when using a TC51/TC56 unit with the Rugged Boot/Exoskeleton or Pistol Grip Handle attached.</li> <li>▶Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01)</li> <li>▶Connects to rugged charge connector on bottom of TC51/TC56</li> <li>▶Includes Power Supply (PWR-BGA12V108W0WW) and DC Line Cord (CBL-DC-381A1-01)</li> </ul>	<p>AC Line Cord (23844-00-00R)</p>

<p>CRD-TC51-5SC4B-01</p>		<p>5-Slot Charge-Only ShareCradle with Spare Battery Charging slot</p>	<ul style="list-style-type: none"> <li>▶Will charge up to four TC51/TC56 units and four spare batteries.</li> <li>▶Will charge battery in TC51/56 from 0-90% in as little as 2.5 hours and batteries in Spare Charger will charge from 0-90% in less than 2 hours.</li> <li>▶Compatible with TC51/TC56 units with hand strap, Rugged Boot, or Pistol Grip Handle attached.</li> <li>▶Includes cradle insert/shim that requires removal when using a TC51/TC56 unit with the Rugged Boot/Exoskeleton or Pistol Grip Handle attached.</li> <li>▶Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01)</li> <li>▶Connects to rugged charge connector on bottom of TC51/TC56</li> <li>▶Includes Power Supply (PWR-BGA12V108WOWW) and DC Line Cord (CBL-DC-381A1-01)</li> </ul>	<p>AC Line Cord (23844-00-00R)</p>
<p>CRD-TC51-5SETH-01</p>		<p>5-Slot Ethernet/Charging ShareCradle</p>	<ul style="list-style-type: none"> <li>▶Allows network speeds up to 1 Gb</li> <li>▶Will charge up to five TC51/TC56 units.</li> <li>▶Will charge battery in TC51/56 from 0-90% in as little as 2.5 hours.</li> <li>▶Does not charge spare batteries</li> <li>▶Compatible with TC51/TC56 units with hand strap, Rugged Boot, or Pistol Grip Handle attached.</li> <li>▶Includes cradle insert/shim that requires removal when using a TC51/TC56 unit with the Rugged Boot/Exoskeleton or Pistol Grip Handle attached.</li> <li>▶Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01)</li> <li>▶Connects to rugged charge connector on bottom of TC51/TC56</li> <li>▶Includes Power Supply (PWR-BGA12V108WOWW) and DC Line Cord (CBL-DC-381A1-01)</li> </ul>	<p>AC Line Cord (23844-00-00R)</p>
<p>367-4288 (3rd party)</p> <p>Contact: Bill Donehoo office: 630-549-6258 bdonehoo@ens-co.com</p> <p><a href="http://www.ens-co.com">http://www.ens-co.com</a></p>		<p>ENS ShareCradle Adapter for TC51/56 and Verifone e355 Payment Device</p>	<ul style="list-style-type: none"> <li>▶Adapter connects onto ShareCradles (CRD-TC51-1SCU-01 or CRD-TC51-5Sxxx-xx)</li> <li>▶Will charge both TC51/TC56 and Verifone e355.</li> <li>▶Compatible with TC51/TC56 units with ENS Holder/Sled for Verifone e355 Payment Device (367-4190) attached.</li> <li>▶Connects to rugged charge/communication connector on bottom of TC51/TC56 and charge connector on bottom of e355.</li> </ul>	<ul style="list-style-type: none"> <li>▶TC51/TC56 ShareCradle - Single (CRD-TC51-1SCU-01) or 5-Slot (CRD-TC51-5Sxxx-xx)</li> <li>▶Rugged Boot/Exoskeleton (SG-TC51-EXO1-01) - handstrap that is included with Boot will not be used.</li> <li>▶ENS Holder/Sled for Verifone e355 Payment Device (367-4190)</li> <li>▶Verifone e355</li> </ul>

<p>SAC-TC51-4SCHG-01</p>		<p>4-Slot Battery Charger</p>	<ul style="list-style-type: none"> <li>▶Charges up to four spare batteries only</li> <li>▶Batteries will charge from 0-90% in less than 2 hours</li> <li>▶Can be used standalone or up to 4 Chargers can be mounted on Mounting Bracket (BRKT-SCRD-SMRK-01)</li> </ul>  <ul style="list-style-type: none"> <li>▶Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01)</li> </ul>	<p>AC Line Cord (23844-00-00R)</p>
<p>SAC-TC51-HC4SC-01</p>		<p>4-Slot Healthcare Battery Charger</p>	<ul style="list-style-type: none"> <li>▶Has Healthcare white disinfectant ready housing.</li> <li>▶Charges up to four spare batteries only</li> <li>▶Batteries will charge from 0-90% in less than 2 hours</li> <li>▶Can be used standalone or up to 4 Chargers can be mounted on Mounting Bracket (BRKT-SCRD-SMRK-01)</li> </ul>  <ul style="list-style-type: none"> <li>▶Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01)</li> </ul>	<p>AC Line Cord (23844-00-00R)</p>
<p>BRKT-SCRD-SMRK-01</p>		<p>5-Slot ShareCradle Mounting Bracket</p>	<ul style="list-style-type: none"> <li>▶Allows for rack and wall mounting of one 5-Slot ShareCradle, up to four Single Slot ShareCradles, or up to four 4-Slot Battery Chargers.</li> <li>▶Bracket can be mounted on standard 19" network rack or on a wall.</li> <li>▶Has cable routing slots and removable power supply tray that stores and conceals power supplies.</li> <li>▶Adjustable tabs &amp; screw mounts for easy hanging/installation.</li> <li>▶Adjustable orientations: <ul style="list-style-type: none"> <li>- 25° High Density (5-Slot Charge Only Cradle)</li> <li>- Horizontal (Single Slot Cradle or 4-Slot Battery Chargers)</li> </ul> </li> </ul>	




<p>CRD-TC56-CVCD1-01</p>		<p>Charge-Only Vehicle Cradle</p>	<ul style="list-style-type: none"> <li>▶Uses unique tabs on power cable connector to ensure reliable power connection.</li> <li>▶Includes removable mounting plate that provides for quick removal of the cradle using a single thumb screw on the top of the cradle.</li> <li>▶Only works with devices with Rugged Boot attached.</li> <li>▶Does not support Pistol Grip Handle.</li> </ul>	<p>Rugged Boot with Handstrap (SG-TC51-EXO1-01)</p> <p><b>For Charging:</b> Cigarette Lighter Auto Charge Cable (3PTY-PCLIP-945082) OR Hard Wired Auto Charge Cable (3PTY-PCLIP-945081)</p> <p><b>For Mounting:</b> Windshield Suction Mount (RAM-B-166U) OR See other RAM or ProClip mounting bracket options below.</p>
<p>PSVTC56-01 (Charge-Only Cigarette Lighter Adapter plug)</p> <p>PSVTC56-02 (Charge-Only Hard-wired power connection)</p> <p>(3rd party)</p> <p><a href="http://www.portsmith.com">http://www.portsmith.com</a></p>		<p>PortSmith Charge-Only Vehicle Cradles</p>	<ul style="list-style-type: none"> <li>▶Available in both hard-wired and cigarette light adapter cable configurations</li> <li>▶Durable cradle design for rugged enterprise use</li> <li>▶AMPS hole pattern for simple wall, pedestal or vehicle dashboard mounting</li> <li>▶Swivel mount</li> <li>▶Compatible with devices with and without Rugged Boot/Exoskeleton attached.</li> </ul>	
<p>CRD-TC56-UVCD1-01</p>		<p>Charge/Communication Vehicle Cradle</p>	<ul style="list-style-type: none"> <li>▶Only works with devices with Rugged Boot attached.</li> <li>▶Does not support Pistol Grip Handle.</li> <li>▶15 pin connector on cable is used to attach to USB I/O Hub (SHARE-USBH-01) - Hub will power the Cradle and charge the TC51/TC56</li> </ul>	<p>Rugged Boot with Handstrap (SG-TC51-EXO1-01) and USB I/O Hub (SHARE-USBH-01)</p> <p><b>For Mounting:</b> Windshield Suction Mount (RAM-B-166U) OR See other RAM or ProClip mounting bracket options below.</p>

SHARE-USBH-01		USB I/O Hub for Vehicle Data Communication Cradle	<ul style="list-style-type: none"> <li>▶15 pin connector on cable is used to attach to Charge/Communication Vehicle Cradle (CRD-TC56-UVCD1-01)</li> <li>▶Includes the following ports: <ul style="list-style-type: none"> <li>- 3 standard USB A size ports - each can provide 1.5A current.</li> <li>- 1 USB A Charge-Only port - can provide 1.5A current or charging cell phones, tablets, headsets, etc.</li> </ul> </li> <li>▶Host device (TC51/TC56) is automatically placed in USB Host mode</li> <li>▶Accepts 12/24V power from vehicle and provides power conditioning (SAE/ISO) to host device (TC51/TC56)</li> <li>▶Hub must be powered externally for USB ports to be functional.</li> <li>▶NOTE: 3.5mm headset jack connector on hub is not supported with TC51/TC56. Use TC51/TC56's built-in jack instead.</li> </ul>	<p>Rugged Boot with Handstrap (SG-TC51-EXO1-01) and Charge/Communication Vehicle Cradle (CRD-TC56-UVCD1-01)</p> <p><b>For Charging:</b> Cigarette Lighter Auto Charge Cable (CHG-AUTO-CLA1-01) OR Hard Wired Auto Charge Cable (CHG-AUTO-HWIRE1-01)</p> <p><b>For Mounting:</b> Mount on flat surface OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>
CHG-AUTO-CLA1-01		Cigarette Lighter Auto Charger Cable for USB I/O Hub	<ul style="list-style-type: none"> <li>▶12/24V</li> <li>▶Includes tab on Barrel jack end for ensuring a reliable connection to USB I/O Hub (SHARE-USBH-01).</li> <li>▶Only compatible with USB I/O Hub (SHARE-USBH-01) which then powers TC51/TC56 Charge-Communication Vehicle Cradle (CRD-TC56-UVCD1-01)</li> </ul>	
CHG-AUTO-HWIRE1-01		Hard Wired Auto Charger Cable for USB I/O Hub	<ul style="list-style-type: none"> <li>▶12/24V</li> <li>▶Includes tab on Barrel jack end for ensuring a reliable connection to USB I/O Hub (SHARE-USBH-01).</li> <li>▶Bare wire end connects directly to vehicle power source.</li> <li>▶Only compatible with USB I/O Hub (SHARE-USBH-01) which then powers TC51/TC56 Charge-Communication Vehicle Cradle (CRD-TC56-UVCD1-01)</li> <li>▶Approximate cable length is 13 ft.</li> </ul>	
3PTY-PCLIP-945082		Cigarette Lighter Auto Charger Cable for Charge-Only Vehicle Cradle	<ul style="list-style-type: none"> <li>▶Only compatible with TC51/TC56 Charge-Only Vehicle Cradle (CRD-TC56-CVCD1-01)</li> </ul>	
3PTY-PCLIP-945081		Hard Wired Auto Charger Cable for Charge-Only Vehicle Cradle	<ul style="list-style-type: none"> <li>▶Only compatible with TC51/TC56 Charge-Only Vehicle Cradle (CRD-TC56-CVCD1-01)</li> </ul>	
RAM-B-166U		Vehicle Cradle Windshield Suction Cup Mount	<ul style="list-style-type: none"> <li>▶RAM Twist Lock Suction Cup with Double Socket Arm and Diamond Base Adapter</li> <li>▶Overall Length: 6.75"</li> <li>▶Attaches to back of Vehicle Cradles</li> </ul>	

RAM-B-238U		Vehicle Cradle RAM Mount ball	<ul style="list-style-type: none"> <li>▶RAM 2.43" x 1.31" Diamond Ball Base w/ 1" Ball</li> <li>▶Attaches to back of Vehicle Cradles</li> </ul>	Requires additional RAM hardware to mount vehicle cradle
3PTY-PCLIP-215500		Tilt Swivel Mount For TC7X/TC51/TC56 Vehicle Cradles 	<ul style="list-style-type: none"> <li>▶For mounting Vehicle Cradle on any flat surface.</li> <li>▶Angles/Tilts 15 degrees</li> <li>▶Swivels 360 degrees</li> <li>▶Extends 1 inch / 2.54 cm</li> <li>▶Base Plate and Face Plate has AMPS hole pattern</li> <li>▶Weight capacity 25 lbs / 11.34 kgs</li> <li>▶NOTE: Restricted Product - Must open CPR at <a href="http://cpr.zebra.com">http://cpr.zebra.com</a> (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details.</li> </ul>	Vehicle Cradle (CRD-TC56-CVCD1-01 or CRD-TC56-UVCD1-01)
3PTY-PCLIP-710834		4" tall Pedestal Mounting Kit For TC7X/TC51/TC56 Vehicle Cradles - Horizontal & Vertical Adjustment 	<ul style="list-style-type: none"> <li>▶4 inch Solid-core Aluminum quick-adjust interlocking joints.</li> <li>▶Mount also features a 2 inch 90-degree offset extension rod to enable both horizontal and vertical adjustment to achieve optimal device/cradle positioning.</li> <li>▶AMPS hole pattern in mount bases</li> <li>▶Quick and easy installation</li> <li>▶Adjustable for optimal positioning</li> <li>▶Weight capacity over 300 lbs</li> <li>▶NOTE: Restricted Product - Must open CPR at <a href="http://cpr.zebra.com">http://cpr.zebra.com</a> (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details.</li> </ul>	Vehicle Cradle (CRD-TC56-CVCD1-01 or CRD-TC56-UVCD1-01)
3PTY-PCLIP-710835		4" tall Pedestal Mounting Kit - Horizontal Adjustment 	<ul style="list-style-type: none"> <li>▶4 inch Solid-core Aluminum quick-adjust interlocking joints.</li> <li>▶Mount also features a 2 inch Horizontal extension rod between mount bases</li> <li>▶AMPS hole pattern in mount bases</li> <li>▶Quick and easy installation</li> <li>▶Adjustable for optimal positioning</li> <li>▶Weight capacity over 300 lbs</li> <li>▶NOTE: Restricted Product - Must open CPR at <a href="http://cpr.zebra.com">http://cpr.zebra.com</a> (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details.</li> </ul>	Vehicle Cradle (CRD-TC56-CVCD1-01 or CRD-TC56-UVCD1-01)

3PTY-PCLIP-710836		<p>2" tall Pedestal Mounting Kit For TC7X/TC51/TC56 Vehicle Cradle</p> 	<ul style="list-style-type: none"> <li>▶2 inch Solid-core Aluminum quick-adjust interlocking joint.</li> <li>▶The round bases provide an industry-standard 4-hole AMPS mounting pattern with approximately 20 degrees of rotation to facilitate the perfect mounting angle and device placement.</li> <li>▶Adjustable for optimal positioning</li> <li>▶Weight capacity over 300 lbs</li> <li>▶NOTE: Restricted Product - Must open CPR at <a href="http://cpr.zebra.com">http://cpr.zebra.com</a> (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details.</li> </ul>	Vehicle Cradle (CRD-TC56-CVCD1-01 or CRD-TC56-UVCD1-01)
-------------------	---	--	--	---




**Communication Cables**

Part Number	Picture	Description	Notes	Required Items
TBD		USB-C cable	<ul style="list-style-type: none"> <li>▶USB-A to USB-C cable</li> <li>▶Attaches to USB-C port which is located under the rugged 7-pin connector on the bottom of the device.</li> <li>▶NOTE: Use of USB C cable is ONLY intended for use for application developer use. Use of this cable by end-users is NOT recommended or supported!</li> </ul>	
3rd party		USB-C cable	<ul style="list-style-type: none"> <li>▶Attaches to USB-C port which is located under the rugged 7-pin connector on the bottom of the device.</li> <li>▶NOTE: Use of USB C cable is ONLY intended for use for application developer use. Use of this cable by end-users is NOT recommended or supported!</li> </ul>	
25-124330-01R		Single Slot Cradle to PC/Host USB cable	<ul style="list-style-type: none"> <li>▶Used with Single Slot Cradle</li> <li>▶Micro USB connection on cradle end</li> </ul>	
CBL-TC51-USB1-01		Snap-on USB Communication/Charging Cable	<ul style="list-style-type: none"> <li>▶Attaches to rugged charge/communicator port on bottom of TC51/TC56.</li> <li>▶Will charge battery in TC51/56 from 0-90% in as little as 2.5 hours when used with USB Power Supply (PWR-WUA5V12W0xx)</li> <li>▶Includes insert/shim that requires removal when using a TC51/TC56 unit with the Rugged Boot/Exoskeleton attached.</li> </ul>	<p><u>For standalone charging:</u>  <b>Indoor use:</b> order Country Specific version of USB Power Supply (PWR-WUA5V12W0xx)</p> <p><b>In Vehicle use:</b> USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01)</p>
3rd party		USB micro-A to USB A Female adapter	<ul style="list-style-type: none"> <li>▶Allows the TC51/TC56 to act as a USB host to connect to devices like USB flash drives/memory sticks, mice, etc.</li> <li>▶Connects to Single Slot USB Cradle</li> </ul>	

<http://www.cyberguys.com/product-details/?productid=33062>








**Snap-On Accessories**

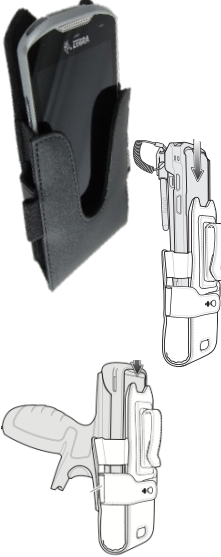


Part Number	Picture	Description	Notes	Required Items
KT-TC51-TRG1-01		Pistol Grip Trigger Handle and Boot Kit	<ul style="list-style-type: none"> <li>▶Trigger Handle accessory offers customers the option of using the product in a gun form factor, ideal for scan-intensive situations.</li> <li>▶Trigger Handle attaches to the mounts on the Rugged Boot (required). There are no mounting points on the terminal itself.</li> <li>▶Trigger Handle uses a mechanical design to press the back facing button on the TC51/TC56.</li> <li>▶Kit includes Pistol Grip Trigger Handle (TRG-TC51-SNP1-01) and Rugged Boot/Exoskeleton (SG-TC51-EXO1-01).</li> <li>▶Does not include Handstrap that is normally included with the Rugged Boot (SG-TC51-EXO1-01).</li> <li>▶Optional Wrist Strap (SG-PD40-WLD1-01) also available.</li> <li>▶Blocks view of rear facing camera</li> </ul>	
TRG-TC51-SNP1-01		Pistol Grip Trigger Handle	<ul style="list-style-type: none"> <li>▶Trigger Handle accessory offers customers the option of using the product in a gun form factor, ideal for scan-intensive situations.</li> <li>▶Trigger Handle attaches to the mounts on the Rugged Boot (required). There are no mounting points on the terminal itself.</li> <li>▶Trigger Handle uses a mechanical design to press the back facing button on the TC51/TC56.</li> <li>▶This SKU is typically ordered for spare/replacement Trigger Handles. For new installations order KT-TC51-TRG1-01 which will also include the required Rugged Boot.</li> <li>▶Optional Wrist Strap (SG-PD40-WLD1-01) also available.</li> <li>▶Blocks view of rear facing camera</li> </ul>	Rugged Boot/Exoskeleton (SG-TC51-EXO1-01) - handstrap that is included with Boot will not be used.
See RFD8500 Accessories Document for additional Info		UHF RFID Sled for TC51	<ul style="list-style-type: none"> <li>▶Adapter allows TC51 to be mounted on top of RFD8500.</li> <li>▶TC51 adapter (ADP-TC51-100) attaches to top of RFD8500 unit.</li> </ul>	






**Misc**



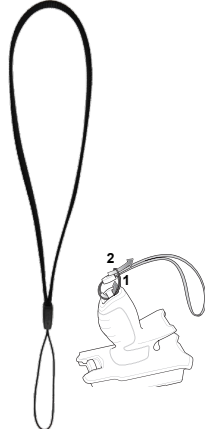

Part Number	Picture	Description	Notes	Required Items
-------------	---------	-------------	-------	----------------






<p>SG-TC51-HLSTR1-01</p>		<p>Soft Holster</p>	<ul style="list-style-type: none"> <li>▶Vertical orientation with Open Bucket design to accommodate base TC51/TC56, unit with optional Rugged Boot/Exoskeleton, or optional Pistol Grip Trigger Handle.</li> <li>▶Strap on rear of holster allows adjustment for use with the accessory options mentioned above.</li> <li>▶Leather material.</li> <li>▶Includes Loop and tether point for optional stylus.</li> <li>▶Non rotating for maximum durability.</li> <li>▶Holster includes cut-out for speaker output.</li> </ul>	
<p>SG-TC51-BHDSTP1-01 (single strap)</p> <p>SG-TC51-BHDSTP1-03 (pack of 3)</p>		<p>Basic Handstrap for TC51 (no boot)</p>	<ul style="list-style-type: none"> <li>▶Compatible with TC51 units without the Rugged Boot/Exoskeleton attached.</li> <li>▶Not compatible with TC56 units - does not have tether loop bar on bottom of device.</li> </ul>	

<p>SG-TC51-EXO1-01</p>		<p>Rugged Boot/Exoskeleton with Handstrap</p>	<ul style="list-style-type: none"> <li>▶Boot increases drop spec of device one additional foot (4 ft. to 5 ft.)</li> <li>▶Includes one handstrap (SG-TC51-EHDSTP1)</li> </ul>	
<p>Submit a Custom Products Request at <a href="http://cpr.zebra.com">http://cpr.zebra.com</a> (Zebra internal site)</p>		<p>Additional Rubber Boot options</p>	<ul style="list-style-type: none"> <li>▶Custom boot color and logo options</li> </ul>	
<p>AF2567DW (3rd party)</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Arm/Wrist Mount Holster</p>	<ul style="list-style-type: none"> <li>▶Allows TC51/TC56 to be worn as a wearable device.</li> <li>▶Wearable design allows the user to have easy access to the device while having the ability to use both hands.</li> <li>▶Breathable material keeps the wrist cool and comfortable.</li> <li>▶Case rotates to desired angle - can be used in portrait or landscape mode.</li> <li>▶Not compatible with devices with Rugged Boot/Exoskeleton attached.</li> </ul>	
<p>SL2378 (3rd party)</p> <p><a href="http://www.systemslink.co.uk">http://www.systemslink.co.uk</a></p>		<p>Arm/Wrist Mount Holster</p>	<ul style="list-style-type: none"> <li>▶Allows TC51/TC56 to be worn as a wearable device.</li> <li>▶Wearable design allows the user to have easy access to the device while having the ability to use both hands.</li> <li>▶Breathable synthetic material keeps the wrist cool and comfortable.</li> <li>▶Not compatible with devices with Rugged Boot/Exoskeleton attached.</li> </ul>	

<p>367-4190 (3rd party)</p> <p>Contact: Bill Donehoo office: 630-549-6258 bdonehoo@ens-co.com</p> <p><a href="http://www.ens-co.com">http://www.ens-co.com</a></p>		<p>ENS Holder/Sled for Verifone e355 Payment Device</p>	<ul style="list-style-type: none"> <li>▶Holder/Sled attaches to TC51/TC56 Rugged Boot/Exo-Skeleton and will hold Verifone e355 Payment Device.</li> <li>▶Overall weight &amp; dimensions (with TC51/56 and Verifone e355 installed): .11 lbs, 6.23 in. L x 3.26 in. W x 1.64 in. H</li> <li>▶Compact for mobility - easily fits in the palm of your hand to be used as a handheld case.</li> <li>▶Accessibility to all scan and payment features on both devices</li> <li>▶Bluetooth connection between TC51/TC56 and e355</li> <li>▶Quick release option to remove TC51/56 from Holder/Sled to allow user access to change battery.</li> <li>▶Option to lock out quick-release access with pin-type security set screws on both sides of ENS Holder/Sled.</li> <li>▶Not compatible with Pistol Grip Trigger Handle</li> </ul>	<ul style="list-style-type: none"> <li>▶Rugged Boot/Exoskeleton (SG-TC51-EXO1-01) - handstrap that is included with Boot will not be used.</li> <li>▶Recommend using ENS Single Slot USB/Charging ShareCradle for TC51/56 and Verifone e355 Payment Device (367-4288) for charging</li> </ul>
<p>SG-TC51-EHDSTP1-03 (pack of 3)</p>		<p>Replacement Handstraps for TC51/TC56 units with Boot</p>	<ul style="list-style-type: none"> <li>▶Compatible with TC51/TC56 units with the Rugged Boot/Exoskeleton attached.</li> <li>▶This strap is normally included with each Rugged Boot/Exoskeleton</li> </ul>	
<p>SG-PD40-WLD1-01</p>		<p>Wrist Strap for Rugged Boot or Trigger Handle</p>	<ul style="list-style-type: none"> <li>▶Attaches to bottom of Pistol Grip Trigger Handle (TRG-TC51-SNP1-01) or to tether point on rear of Rugged Boot (SG-TC51-EXO1-01)</li> </ul>	


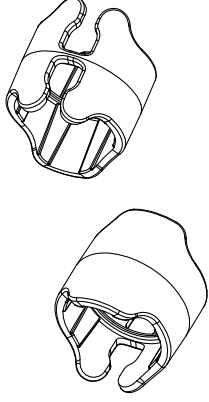




SG-TC51-CLIPHC1-01		Healthcare Carrying Clip	<ul style="list-style-type: none"> <li>▶Clip is used with Healthcare versions of TC51 to allow user to conveniently attach the device to healthcare clothing (i.e. smocks, etc.).</li> <li>▶Clip attaches to top of TC51 unit.</li> <li>▶Has Healthcare blue disinfectant ready housing.</li> <li>▶Not compatible with Basic Handstrap (SG-TC51-BHDSTP1-03) or Rugged Boot/Exoskeleton (SG-TC51-EXO1-01)</li> </ul>	
SG-TC7X-STYLUS-03 (pack of 3)		Stylus Kit with Tether	<ul style="list-style-type: none"> <li>▶Includes fine-pitch, capacitive Stylus (SG-TC7X-STYLUS1-03) and coiled tether (KT-TC7X-TETHR1-03)</li> <li>▶Conductive Carbon-filled plastic material w/ 5mm tip.</li> <li>▶Length of stylus is 3.5".</li> <li>▶Rigid plastic stylus is optimized for enterprise durability.</li> <li>▶Clip &amp; tether point to reduce loss. Tether to Handstrap</li> <li>▶When not being used stylus can be stored in loop on Handstrap or in the optional Holster</li> </ul>	
SG-TC7X-STYEX1-3 (pack of 3)		Extended Length Stylus	<ul style="list-style-type: none"> <li>▶Conductive Carbon-filled plastic material w/ 5mm tip</li> <li>▶Rigid plastic stylus is optimized for enterprise durability.</li> <li>▶Clip &amp; tether point to reduce loss.</li> <li>▶When not being used stylus can be stored in optional Holster</li> </ul>	
SG-ET5X-SLTETR-01		Coiled Tether for Stylus		
HDST-35MM-PTVP-01		PTT and VoIP Headset (3.5mm jack)	<ul style="list-style-type: none"> <li>▶For Push-To-Talk (PTT) and VoIP telephony</li> <li>▶Uses 3.5mm rugged jack that is keyed/collared for a locking failsafe connection.</li> <li>▶Rotating earpiece allows for right or left ear configuration</li> <li>▶Built-in cord wrap</li> <li>▶mono with microphone</li> <li>▶includes clip for attaching PTT button to clothing.</li> </ul>	3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01)




<p>HDST-25MM-PTVP-01</p>		<p>PTT and VoIP Headset (2.5mm jack)</p>	<ul style="list-style-type: none"> <li>▶For Push-To-Talk (PTT) <b>and</b> VoIP telephony</li> <li>▶2.5 mm jack</li> <li>▶Rotating earpiece allows for right or left ear configuration</li> <li>▶Built-in cord wrap</li> <li>▶mono with microphone</li> <li>▶includes clip for attaching PTT button to clothing.</li> <li>▶Recommend using 3.5mm headset (HDST-35MM-PTVP-01) instead since this feature a more secure locking jack connector.</li> </ul>	<p>2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01)</p>
<p>See HS2100-HS3100 Accessories Document</p>		<p>HS2100 Rugged Wired Headset</p>	<ul style="list-style-type: none"> <li>▶Built to handle the everyday inevitable drops</li> <li>▶Dustproof, sprayproof and waterproof</li> <li>▶Ready for the freezer and outdoor subzero temperatures</li> <li>▶Feather-light for extraordinary comfort</li> <li>▶Noise cancellation for a superior voice experience in the noisiest environments</li> <li>▶Detachable swivel boom minimizes costs.</li> <li>▶Swivelling boom mutes microphone allowing uses to prevent voice pick applications from recognizing non-voice pick conversations.</li> <li>▶User-replaceable pads and windscreens maximize comfort and hygiene</li> </ul>	<p>3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01) and HS2100 to 3.5mm Standard Cable (CBL-HS2100-3MS1-01)</p> <p>See HS2100/HS3100 Accessories Document for additional headset accessories</p>
<p>RCH51</p>		<p>Rugged Cabled Headset</p>	<ul style="list-style-type: none"> <li>▶For VoIP use only, not Push-To-Talk (PTT)</li> <li>▶Improved to withstand chemicals in certain hair gels</li> <li>▶Noise cancelling microphone filters ambient noise inches away</li> <li>▶Extremely rugged strain relief features ensure cable bend tolerance, even at -30C</li> <li>▶IP67 sealing throughout the headset protects sensitive components from moisture and dust</li> <li>▶High-strength plastics survive 6' drop at -30C &amp; 500 tumbles</li> <li>▶Weight: 4 oz.</li> <li>▶See RCH50/RCH51 Accessories Document for additional accessories</li> </ul>	<p><b>For 3.5mm locking jack (recommended):</b> 3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01) AND RCH50/RCH51 Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p><b>For 2.5mm jack:</b> 2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01) AND Headset Adapter Cable (25-124387-02R)</p>
<p>RCH50</p>		<p>Rugged Cabled Headset</p>	<ul style="list-style-type: none"> <li>▶Discontinued 10/2011, now use RCH51</li> <li>▶Noise cancelling microphone filters ambient noise inches away</li> <li>▶Extremely rugged strain relief features ensure cable bend tolerance, even at -30C</li> <li>▶IP67 sealing throughout the headset protects sensitive components from moisture and dust</li> <li>▶High-strength plastics survive 6' drop at -30C &amp; 500 tumbles</li> <li>▶Weight: 4 oz.</li> <li>▶See RCH50 Accessories Document for additional accessories</li> </ul>	<p><b>For 3.5mm locking jack (recommended):</b> 3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01) AND RCH50/RCH51 Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p><b>For 2.5mm jack:</b> 2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01) AND Headset Adapter Cable (25-124387-02R)</p>

<p>50-11300-050R</p>		<p>Noise Cancelling Headset</p>	<p>▶Discontinued 8/2011, now use RCH50</p>	<p><b>For 3.5mm locking jack (recommended):</b>  3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01)  AND  RCH50/RCH51 Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p><b>For 2.5mm jack:</b>  2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01)  AND  Headset Adapter Cable (25-124387-02R)</p>
<p>3PTY-VXI-VR12  (Zebra orderable SKU)</p> <p><a href="http://www.vxicorp.com">http://www.vxicorp.com</a></p>		<p>VXI VR12 Wired Noise Cancelling Headset</p> 	<ul style="list-style-type: none"> <li>▶Audio accuracy for voice picking and other speech recognition applications.</li> <li>▶High quality durability stands up to all-day, every-day use.</li> <li>▶Lightweight design is easy and comfortable to wear all day.</li> <li>▶Compatible with most major wearable computers and devices used in voice-picking environments.</li> <li>▶G type (GN Netcom) Quick Disconnect.</li> <li>▶Convertible design gives choice of over-the-head and behind-the-neck wearing styles</li> </ul>	<p><b>For 3.5mm locking jack (recommended):</b>  3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01)  AND  RCH50/RCH51 Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p> <p><b>For 2.5mm jack:</b>  2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01)  AND  Headset Adapter Cable (25-124387-02R)</p>
<p>See HS2100-HS3100 Accessories Document</p>		<p>HS3100 Rugged Bluetooth Headset</p>	<ul style="list-style-type: none"> <li>▶HD Voice, also known as Wide Band Audio, brings incredible audio clarity</li> <li>▶Built to handle the everyday inevitable drops</li> <li>▶Dustproof, sprayproof and waterproof</li> <li>▶Ready for the freezer and outdoor subzero temperatures</li> <li>▶Feather-light for extraordinary comfort</li> <li>▶Noise cancellation for a superior voice experience in the noisiest environments</li> <li>▶Swap batteries on the fly — without losing the Bluetooth connection</li> <li>▶Split-second tap-to-pair simplicity using NFC.</li> <li>▶Detachable swivel boom minimizes costs.</li> <li>▶Swivelling boom mutes microphone allowing uses to prevent voice pick applications from recognizing non-voice pick conversations.</li> <li>▶User-replaceable pads and windscreens maximize comfort and hygiene</li> <li>▶15 hours of battery power</li> </ul>	<p>See HS2100/HS3100 Accessories Document for headset accessories</p>
<p>3PTY-VXI-B250XTP  (Zebra orderable SKU)</p> <p><a href="http://www.vxicorp.com">http://www.vxicorp.com</a></p>		<p>VXI BlueParrott Bluetooth Headset for voice directed applications</p>	<ul style="list-style-type: none"> <li>▶Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired</li> <li>▶<b>Not</b> intended to support peer-to-peer communications (PTT) or VoIP calls</li> <li>▶Allows the use of other BT devices (i.e. RS6000 scanner or mobile printer)</li> </ul>	

<p>3PTY-VXI-EXPWAYII (Zebra orderable SKU)</p> <p><a href="http://www.vxicorp.com">http://www.vxicorp.com</a></p>		<p>VXi BlueParrott Bluetooth Headset for voice directed applications</p>	<ul style="list-style-type: none"> <li>▶Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired</li> <li>▶<b>Not</b> intended to support peer-to-peer communications (PTT) or VoIP calls</li> <li>▶Allows the use of other BT devices (i.e. RS6000 scanner or mobile printer)</li> </ul>	
<p>CBL-HS2100-3MS1-01</p>		<p>HS2100 Headset Standard Cable (3.5 mm jack)</p>	<ul style="list-style-type: none"> <li>▶3.5mm barrel jack connector</li> <li>▶For use with TC51/TC56, TC7X, TC8000, or other devices using a 3.5mm barrel jack audio connector</li> <li>▶Cable is 43" (1.1 M) long</li> <li>▶Rugged cable with rugged connectors that are keyed/collared for a locking failsafe connection.</li> <li>▶Includes one clothing clip. Additional clips can be purchased separately.</li> </ul>	<p>3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01)</p>
<p>25-124387-02R</p>		<p>RCH50/RCH51 Headset Adapter Cable</p>	<ul style="list-style-type: none"> <li>▶Connects RCH50/RCH51 headset to devices with standard 3-pole 2.5mm barrel jack connector.</li> <li>▶Updated cable minimizes cross talk and intermittency issues.</li> </ul>	<p>2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01)</p>
<p>25-124387-01R</p>		<p>RCH50/RCH51 Headset Adapter Cable</p>	<ul style="list-style-type: none"> <li>▶Discontinued 9/2013, now use 25-124387-02R</li> <li>▶Connects RCH50/RCH51 headset to devices with standard 3-pole 2.5mm barrel jack connector.</li> </ul>	<p>2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01)</p>
<p>ADP-35M-QDCBL1-01</p>		<p>RCH50/RCH51 Quick Disconnect Headset Adapter Cable</p>	<ul style="list-style-type: none"> <li>▶Connects RCH50/RCH51 headset (or headsets with Quick-Disconnect connector) to devices with 3-pole 3.5mm barrel jack connector.</li> <li>▶Cable features a rugged keyed/collared jack for a locking failsafe connection.</li> </ul>	<p>3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01)</p>
<p>CBL-TC51-HDST25-01</p>		<p>2.5mm Female to 3.5mm Male Headset Adapter Cable (2.5mm jack)</p>	<ul style="list-style-type: none"> <li>▶Allows headsets with 2.5mm barrel jacks to be used with TC51/TC56.</li> <li>▶Converts 3.5mm audio jack to a standard 2.5mm barrel jack connector.</li> <li>▶Cable is approximately 6 inches long</li> </ul>	







CBL-TC51-HDST35-01		3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (3.5mm jack)	<ul style="list-style-type: none"> <li>►Provides a collared/keyed 3.5mm barrel jack connector.</li> <li>►Required for use with some headsets (i.e. HS2100) that use a locking keyed connector on the headset jack.</li> <li>►Cable is approximately 6 inches long</li> <li>►Includes Retention/Anti-Rotation Lock (ADP-LOCK-3.5HT1-01)</li> </ul>	
ADP-LOCK-3.5HT1-01		Spare/Replacement 3.5mm Audio Adapter Retention and Anti-Rotation Lock	<ul style="list-style-type: none"> <li>►This clip is used with the Keyed/Collared Female to Male Headset Adapter Cable (CBL-TC51-HDST35-01) and keyed headset cables to prevent cable rotation/spinning and also to provide a secure, reliable headset connection.</li> <li>►Clip is normally included with the Keyed/Collared Female to Male Headset Adapter Cable, this is a spare/replacement clip/lock.</li> <li>►NOTE: This is a Spare/Service Parts item. Contact an authorized Zebra reseller to order.</li> </ul>	
KT-TC51-SCRNP1-01 (pack of 3)		Screen Protectors	<ul style="list-style-type: none"> <li>►Tempered glass</li> <li>►Includes alcohol wipes, cleaning cloth, and tools needed for screen protector installation.</li> </ul>	
ADP-TC51-RGIO1-10 (pack of 10)		Replacement Rugged I/O Connector	<ul style="list-style-type: none"> <li>►This is a pack of 10 spare/replacement 7-pin rugged I/O connectors that attach to bottom of the device.</li> <li>►NOTE: This is a Spare/Service Parts item. Contact an authorized Zebra reseller to order.</li> </ul>	
<b>Power Cords/Power Supplies</b>				
<b>Part Number</b>	<b>Picture</b>	<b>Description</b>	<b>Notes</b>	<b>Required Items</b>
CBL-DC-388A1-01		DC Power Cord	<ul style="list-style-type: none"> <li>►Used to power Single Slot Cradles and 4-Slot Battery Chargers when using Level VI Efficiency power supply (PWR-BGA12V50W0WW)</li> <li>►Cable length is 1.8 meters</li> <li>►NOTE: All TC51/TC56 Cradles include this cable.</li> </ul>	
PWR-BGA12V50W0WW		Power Supply	<ul style="list-style-type: none"> <li>►Replaces PWRS-14000-148R</li> <li>►Used to power Single Slot Cradle and 4-Slot Battery Charger</li> <li>►100-240 VAC, 12VDC, 3.33A</li> <li>►Level VI Efficiency rated</li> <li>►NOTE: All TC51/TC56 Cradles include this power supply.</li> </ul>	DC Power Cord (CBL-DC-388A1-01) and AC Line Cord (23844-00-00R)

KIT-PWR-12V50W		Power Supply Kit	<ul style="list-style-type: none"> <li>Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01)</li> </ul>	AC Line Cord (23844-00-00R)
PWRS-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> <li>Discontinued 1/2017, now use PWR-BGA12V50W0WW and CBL-DC-388A1-01 - see PMB 2923 and PMB 2851</li> <li>Replaces KT-14000-148R</li> <li>Used to power 2-Slot Cradle and SACX000 4-Slot Battery Charger</li> <li>100-240 VAC, 12VDC, 3.33A</li> <li>Energy Star Compliant</li> </ul>	AC Line Cord (23844-00-00R)
50-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> <li>Discontinued 12/2007 - replaced by KT-14000-148R</li> <li>Used to power 2-Slot Cradle and SACX000 4-Slot Battery Charger</li> </ul>	AC Line Cord (23844-00-00R)
KT-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> <li>Replaces 50-14000-148R</li> <li>Used to power 2-Slot Cradle and SACX000 4-Slot Battery Charger</li> <li>Discontinued 12/2010 - now use PWRS-14000-148R</li> </ul>	AC Line Cord (23844-00-00R)
CBL-DC-381A1-01		DC Power Cord	<ul style="list-style-type: none"> <li>Used to power 5-Slot ShareCradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW)</li> <li>NOTE: All TC51/TC56 Multi-Slot ShareCradles include this cable.</li> <li>This cable does not include the black extension release latch which is not required when used on Multi-Slot ShareCradles.</li> </ul>	
CBL-DC-382A1-01		DC Power Cord	<ul style="list-style-type: none"> <li>Used to power 5-Slot ShareCradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW)</li> <li>Cable has black extension tab for releasing the cable from the back of the cradle. This isn't required when using Multi-Slot ShareCradles.</li> </ul>	
50-16002-029R		DC Power Cord	<ul style="list-style-type: none"> <li>Not used on TC51/56, now use CBL-DC-382A1-01</li> <li>Used to power 5-Slot ShareCradles</li> </ul>	
PWR-BGA12V108W0WW		Power Supply	<ul style="list-style-type: none"> <li>Replaces PWRS-14000-241R</li> <li>Used to power 5-Slot ShareCradles</li> <li>9A, 108W</li> <li>Level VI Efficiency rated</li> <li>NOTE: All TC51/TC56 Cradles include this power supply.</li> </ul>	DC Power Cord (CBL-DC-382A1-01) and AC Line Cord (23844-00-00R)
PWRS-14000-241R		Power Supply	<ul style="list-style-type: none"> <li>Not used on TC51/56, now use PWR-BGA12V108W0WW and CBL-DC-382A1-01</li> <li>Replaces 50-14000-241R</li> <li>Used to power 5-Slot ShareCradles</li> <li>100-240VAC, 12VDC, 9A</li> <li>Energy Star Compliant</li> </ul>	AC Line Cord (23844-00-00R)
50-14001-004R		Power Supply	<ul style="list-style-type: none"> <li>Discontinued 12/2007 - replaced by 50-14000-241R</li> <li>Used to power 5-Slot ShareCradles</li> </ul>	AC Line Cord (23844-00-00R)

50-14000-241R		Power Supply	<ul style="list-style-type: none"> <li>Replaces 50-14001-004R</li> <li>Used to power 5-Slot ShareCradles</li> <li>Discontinued 12/2010 - now use PWRS-14000-241R</li> </ul>	AC Line Cord (23844-00-00R)
23844-00-00R		AC Line Cord	Used to power Cradles	
PWR-WUA5V12W0US (US plug style) PWR-WUA5V12W0GB (UK plug style) PWR-WUA5V12W0EU (EU plug style) PWR-WUA5V12W0AU (Australia plug style) PWR-WUA5V12W0CN (China plug style) PWR-WUA5V12W0IN (India plug style)		USB Power Supply	<ul style="list-style-type: none"> <li>Used with Rugged USB/Charge Cable (CBL-TC51-USB1-01)</li> <li>Provides higher current (2.5A) for faster charging</li> <li>100-240 VAC, 5 V, 2.5 A</li> </ul>	
CHG-AUTO-USB1-01		USB Cigarette Lighter Adapter	<ul style="list-style-type: none"> <li>Used with Rugged USB/Charge Cable (CBL-TC51-USB1-01)</li> <li>Includes two USB A ports providing higher current (2.5A) for faster charging</li> </ul>	

**Batteries**

Part Number	Picture	Description	Notes	Required Items
BTRY-TC51-43MA1-01 BTRY-TC51-43MA1-10 (10 pack)  BTRY-TC51-43MA1-BR (for use in Brazil)(single battery) BTRY-TC51-43MA1-IN (for use in India)(single battery)		Spare 1X Battery with PowerPrecision <b>Plus</b> (4300 mAh)  	<ul style="list-style-type: none"> <li>Designed, manufactured &amp; tested to meet rigorous controls &amp; standards</li> <li>Premium-grade cells with higher capacity &amp; longer life cycle</li> <li>Designed to help prevent overcharging &amp; electrical shock</li> <li>Strong &amp; robust housing for optimal performance &amp; durability</li> <li>Information available:               <ul style="list-style-type: none"> <li>Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device.</li> <li>Advanced State of Health (highly accurate end-of-life prediction)</li> <li>Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).</li> </ul> </li> </ul>	

<p>BTRY-TC51-43HC1-01 BTRY-TC51-43HC1-10 (10 pack)</p>		<p>Spare Healthcare 1X Battery with PowerPrecision <b>Plus</b> (4300 mAh)</p> 	<ul style="list-style-type: none"> <li>▶Has Healthcare blue disinfectant ready housing.</li> <li>▶Designed, manufactured &amp; tested to meet rigorous controls &amp; standards</li> <li>▶Premium-grade cells with higher capacity &amp; longer life cycle</li> <li>▶Designed to help prevent overcharging &amp; electrical shock</li> <li>▶Strong &amp; robust housing for optimal performance &amp; durability</li> <li>▶Information available: <ul style="list-style-type: none"> <li>- Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device.</li> <li>- Advanced State of Health (highly accurate end-of-life prediction)</li> <li>- Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).</li> </ul> </li> </ul>	
--	---	---	--	--